

# FS 250A 230V



FS 250A 230V

| VARENR. | TYPE  |
|---------|---|
| 72030   | Fordelingssentral FS 250A 230V 12206-R                |
| 72031   | Fordelingssentral FS 250A 230V 12406-R                |
| 72032   | Fordelingssentral FS 250A 230V 03406-R                |
| 72036   | Fordelingssentral FS 250A 230V for brakkerigg 00803-R |

| VARENR.     | RESERVEDELER                                     |
|-------------|--|
| 72882       | Kapsling komplett m/målerskap                    |
| 70206       | Stativ til FS 250                                |
| 72886       | Dør venstre til FS 250A                          |
| 72887       | Dør høyre FS 250A                                |
| 72704       | Sylinderlås (oval) 5537 OLU for låshåndtak       |
| 70170       | Hengsler 50x50                                   |
| 72708/72707 | Nøkkel OLH/OLU                                   |
| 75248       | Sikringsvindu PCE 18 moduler                     |
| 75205       | Stikkontakt innfelt rett 332-9                   |
| 75209       | Stikkontakt innfelt rett 363-9                   |
| 75213       | Stikkontakt innfelt rett 3125-9                  |
| 75200       | Stikkontakt innfelt 2/16+j [Schuko]              |
| 75104       | ABB automatsikring C 63A 3P                      |
| 75125       | ABB jordfeilbryter 63A/100mA S 4P                |
| 75111       | ABB jordfeilautomat C 32A/30mA 3P                |
| 75124       | ABB jordfeilautomat C 16A/30mA 2P                |
| 70436       | ABB jordfeidel RC 222/1 3P                       |
| 70420       | ABB effektbryter T1B 125A 3P LS/I                |
| 70438       | ABB lastbryter T4D 250A 4P                       |
| 70396       | ABB kabelklemme FC CuAl 240mm <sup>2</sup> T3 3P |
| 70395       | ABB kabelklemme Cu 1x185mm <sup>2</sup> T4 3P    |

- **Vekt:** 60-80 kg
- **Kapasitet:** 230V 100kW
- **Mål:** 1163x1438x405mm (BxHxD)

## • Vern 230V

### 72030

- ABB lastbryter 250A 4P 1 stk
- ABB j.f.del RC 222/1 3P 1 stk.
- ABB effektbryter T1B 125A 3P LS/I 1 stk.
- ABB aut.sikring C 63A 3P 2 stk.
- ABB j.f.bryter 63A/100mA 4P 2 stk.
- ABB j.f.automat C 32A/30mA 3P 2 stk.
- ABB j.f.automat C 16A/30mA 2P 2 stk.

### 72031

- ABB lastbryter 250A 4P 1 stk.
- ABB j.f.del RC 222/1 3P 1 stk.
- ABB effektbryter T1B 125A 3P LS/I 1 stk.
- ABB aut.sikring C 63A 3P 2 stk.
- ABB j.f.bryter 63A/100mA 4P 2 stk.
- ABB j.f.automat C 32A/30mA 3P 4 stk.
- ABB j.f.automat C 16A/30mA 2P 2 stk.

### 72032

- ABB lastbryter 250A 4P 1 stk.
- ABB aut.sikring C 63A 3P 3 stk.
- ABB j.f.bryter 63A/100mA 4P 3 stk.
- ABB j.f.automat C 32A/30mA 3P 4 stk.
- ABB j.f.automat C 16A/30mA 2P 2 stk.

### 72036

- ABB lastbryter 250A 4P 1 stk.
- ABB j.f.automat C 32A/30mA 3P 8 stk.
- ABB j.f.automat C 16A/30mA 2P 1 stk.

## • Antall kW som kan føres i kabel 230V

|         |        |      |
|---------|--------|------|
| 3x2,5+j | 316-9  | 6kW  |
| 3x6+j   | 332-9  | 12kW |
| 3x16+j  | 363-9  | 25kW |
| 3x35+j  | 3125-9 | 50kW |

## Bestykning

### 250A 230V 12206-R



### 250A 230V 12406-R



### 250A 230V 03406-R




### 250A 230V 00803-R




## Lås: OLU

BLU, TEV fåes på forespørsel.


## 71030 FS 250A 12206-R 230V med lastbryter

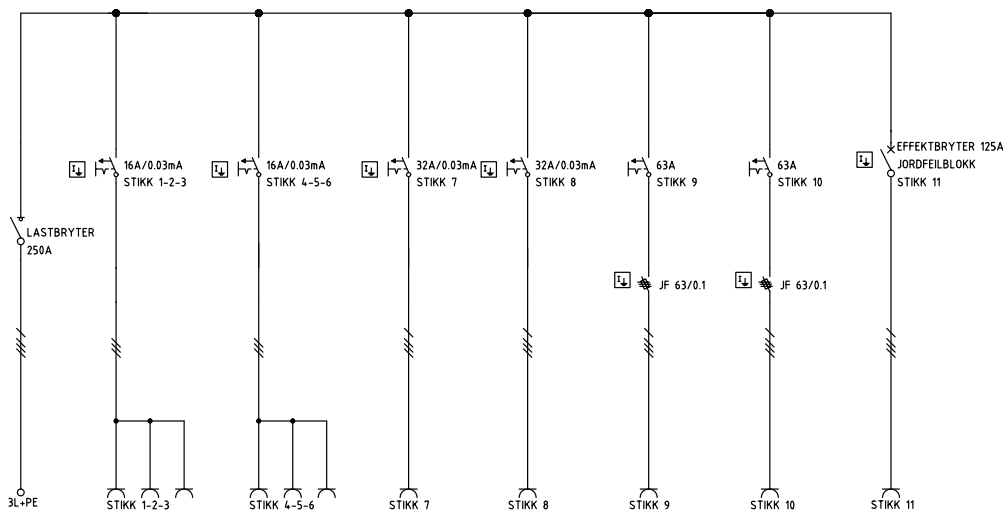

## 71031 FS 250A 12406-R 230V med lastbryter

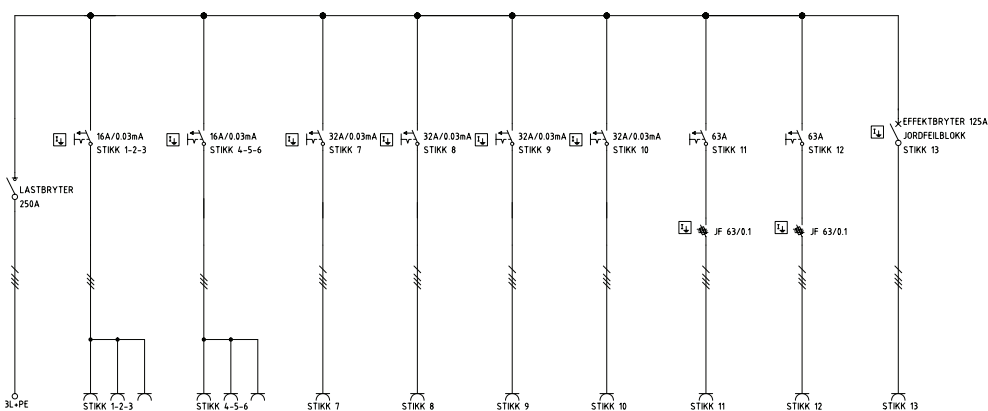

## 71032 FS 250A 03406-R 230V med lastbryter

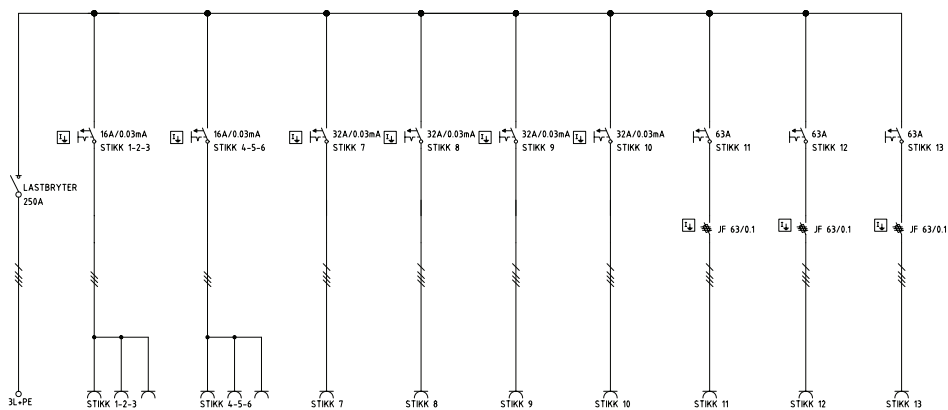

## 71036S FS 250A 00803-R 230V med lastbryter

