

light on your work

X-MINI - LED
4x150W LED - 5,5M



TRIME
Lighting Tower Specialist



X-MINI-LED 4x150W LED - 5,5M

Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-MINI LED has been created beginning from these characteristics. It is the best solution to your needs and guarantees 2000 sqm of illuminated area. 18 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.



5,5m



325Kg



2000sqm



2,4(l) - 0,5(l/h)

- Multi-directionally adjustable and tiltable floodlights
- 5 sections galvanized telescopic vertical mast
- Maximum mast height 5,5 m
- Manual lifting system by winch complete with auto-braking system
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 18 units per truck
- Central lifting eye for effective handling
- Hand trolley
- Light weight for improved manoeuvrability
- Simple, rugged machine design and layout
- Certified windstability up to 80 Km/h
- Electrical coiled cable complete with housing
- Guided main coiled cable to avoid damage during tower operation
- Circuit breaker for electrical protection against circuit breaker
- On/Off switches-one for each lamp
- Easy access for maintenance
- 2 extendable & height adjustable galvanized stabilizers

APPLICATIONS



Gas, oil & mining operations



Special events



Rural & hard to reach areas



Emergency response



Construction & work sites



Military applications



Illuminated area
2000 sqm



***Ease of transport
and handling***




**18
Units Per Truck**



You can place 18 units on a single vehicle thanks to one of the compactest footprints on the market.

KEY BENEFITS

- ✓ *Led technology*
- ✓ *Compact dimensions*
- ✓ *Easy maintenance*

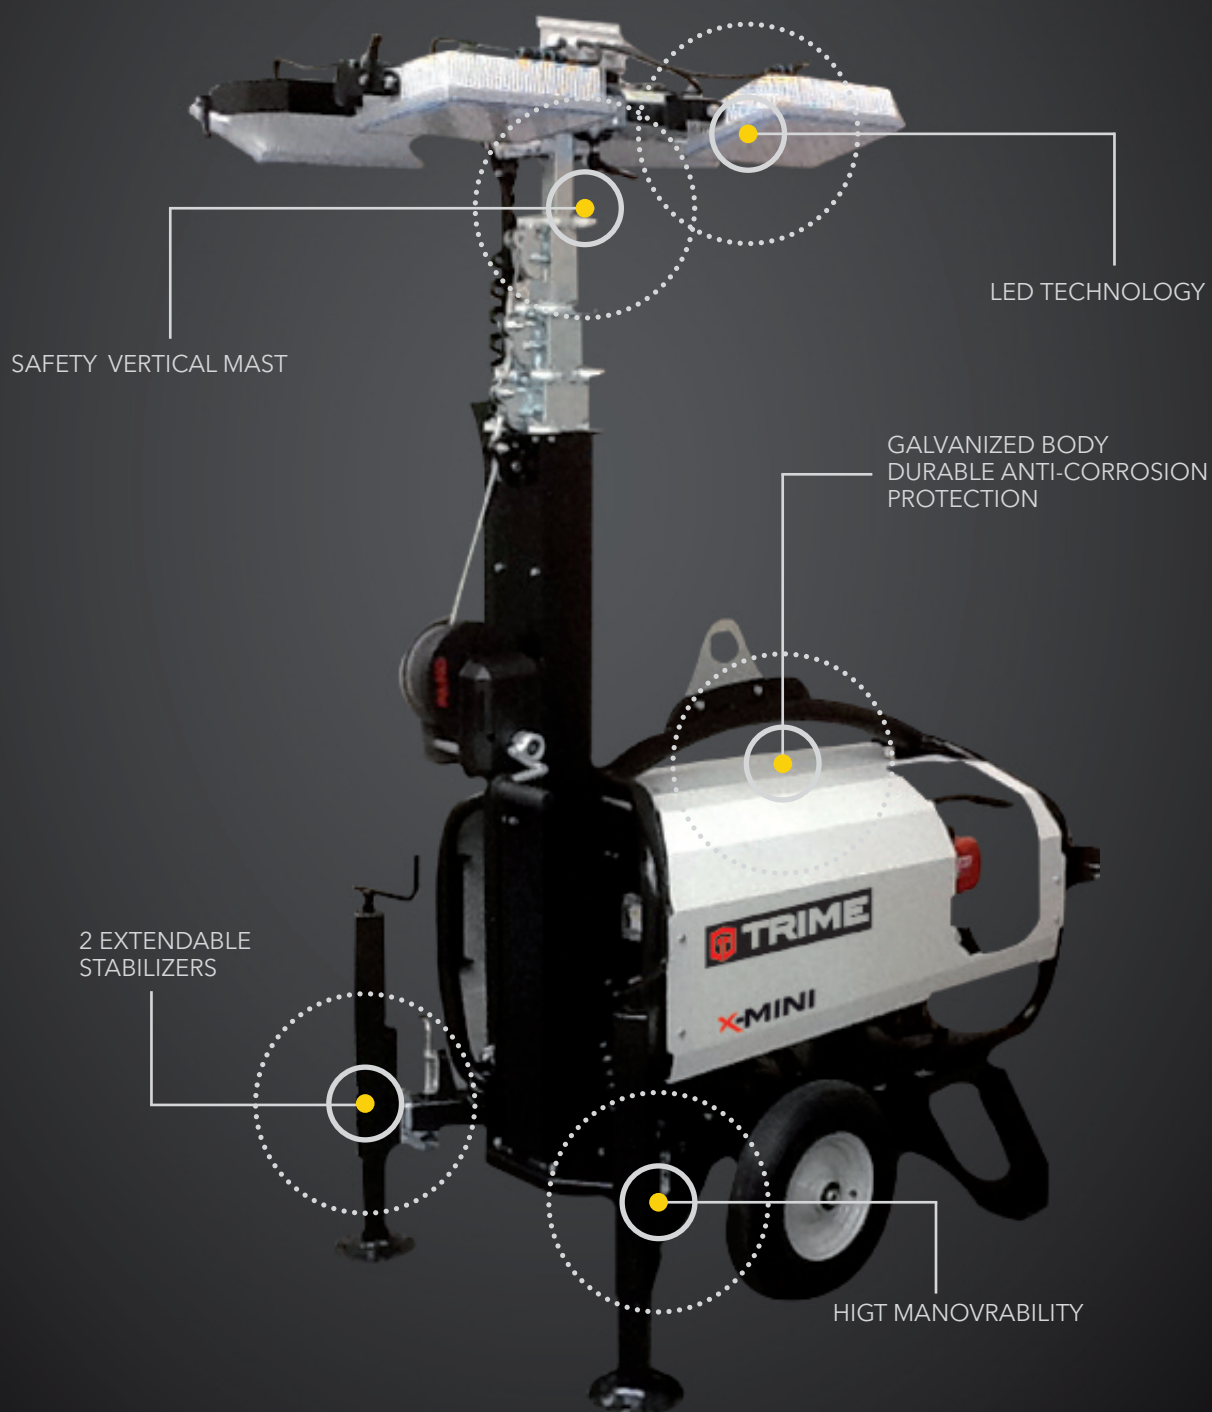

technical data

Dimensions & weight	
Dimensions min. (mm)	1350x950x2160
Dimensions max. (mm)	1700x1320x5500
Total weight without fuel	325 Kg

Features	
Rotation	-
Floodlights	4x150W
Lamps	LED
Options	-

Alternator	
Model	Synchronous
Frequency (Hz)	50
Insulation class	H
Degree of protection	IP23
Single phase voltage	3,5 kVA - 230V
Auxiliary outlets	2,5 KVA

Engine	
Model	Yanmar L48
Fuel	Diesel
r.p.m	3000
Tank capacity (l)	2,4
Consumption (l/h)	0,5 circa
Noise level (dBA) at 7m	75

Standard load delivery


18 sets



Units Per Truck

Illuminated area (5 lux min.)

2000 sqm

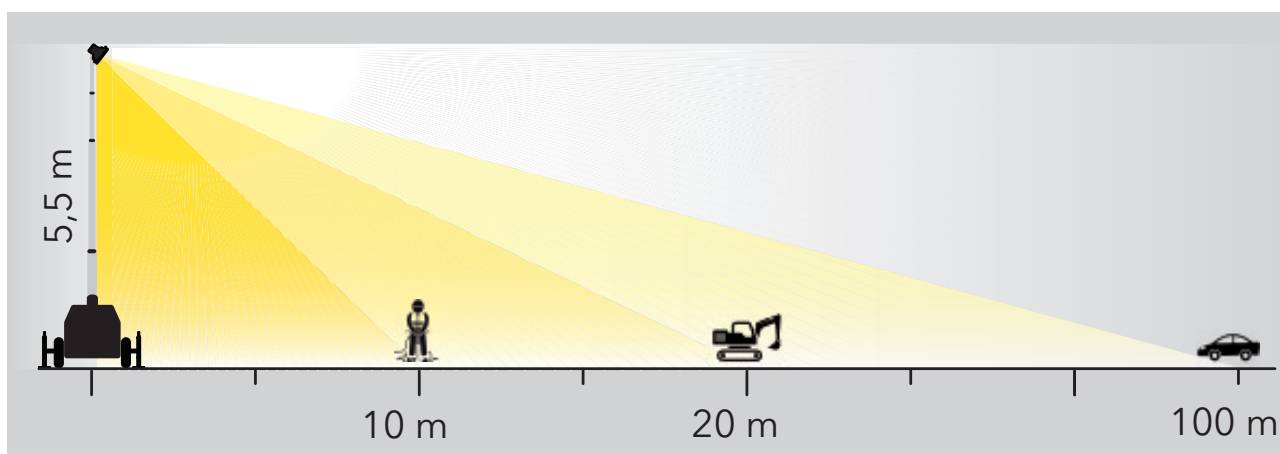

TRIME

Lighting Tower **Specialist**

TRIME s.p.a.

Strada per Robecco, snc
20081 Cassinetta di Lugagnano (MI)
Tel. +39 02 942 1724
www.trime.it - info@trime.it