

30-40m water nebulizer

designed and created for your needs

Designed to provide an exceptional level of performance for every work on site ensuring the right balance between power and ease of use

TKS-40

T-ZERO PRO



ZERO
emissions 

100%
Electric engine
powered

 **WORK**
in safety

 **water**
saving

 **LOW**
maintenance



15kVA
Generator required

 **R.O.T.**
SYSTEM

more sustainable
and environmentally
friendly future

WATER NEBULIZER


TKS-40

T-ZERO PRO



NO PUDDLES
clean and safe work

30-40m water nebulizer

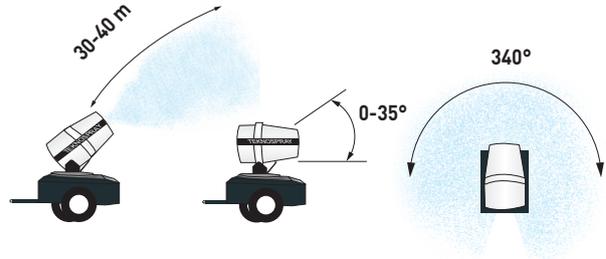

APPLICATIONS



Constructions



Demolitions



Mining operation



Recycling

FEATURES

- ✔ Integrated control panel
- ✔ SMART START SYSTEM
- ✔ Emergency stop button
- ✔ Phase inverter
- ✔ 1 Water pump 2.2 kW
- ✔ 2 Self priming pump for external connection tank 0,05 kW (each)
- ✔ Water pressure Gauge
- ✔ Water Safety pressure switch
- ✔ Manual water drain system
- ✔ Central lifting eye
- ✔ Forklift pockets
- ✔ Stainless steel crown with 24 nozzles
- ✔ 3 height adjustable stabilizers
- ✔ Equipped with big size wheels for off-road site

OPTIONS

- ✔ 60Hz version / 380/480V
- ✔ Inlet plug 32A-110V 50Hz
- ✔ Road Tow trailer



easy handling & transportability

Technical data	
Electric engine power (kW)	7,5
Inlet plug	400V3P+N+T 50Hz 32A
Fan diameter (mm)	900
Water consumption (l/m)	37 - 43
Coverage (m)	30 - 40
Water connection	UNI 45 or STORZ or CAMLOCK
Max. water throw height (m)	10
Min. inlet Water pressure (bar)	1.0
Generator required (kVA)	15
Water inlet filter (Mesh)	60
Y Filter (µm)	500
Electric tilting system	0 - 35°
Automatic oscillation (working angle settable manually)	0 - 340° manual area setting
Dimensions min (mm)	2077x1836x2230
Dimensions max (mm)	2877x1836x2230
Weight (kg)	800



Remote control, 50m range
programmable function "cicle" to start electric motor-water pump oscillation with only one button



Automatic oscillation 0 - 340°
manual area setting



Electric Tilting System



SAFETY

Reduce dust for healthy and safe environment

Safety automatic clutch compliant with HSE norm

Remote control with full operation

- start/stop
- tilt up/down
- turn left/right/auto



TRIME

Sales Dept. +39 0382 406 252 - www.trime.it - info@trime.it

The company reserves the right to modify the technical specifications, items and design without notice. The images of the products are indicative for illustrative purposes only.